



052601
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839

ADDRESS _____
CONTACT IF FOUND: _____

5-30-00

A

05/26/00



Process Mail Label No. EJ398371752US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

 Docket No.
APP 1211-US

 Total Pages in this Submission
3

TO THE ASSISTANT COMMISSIONER FOR PATENTS

 Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

Method and System for Measuring IP Performance Metrics

and invented by:

Krishna Kant - Richard C. Lau - Bruce Siegel



If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 30 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
APP 1211-US

Total Pages in this Submission
3

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 13
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EJ398371752US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
APP 1211-US

Total Pages in this Submission
3

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	41	- 20 =	21	x \$18.00	\$378.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,302.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **02-1820** as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of **\$1,302.00** as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **MAY 26, 2000**

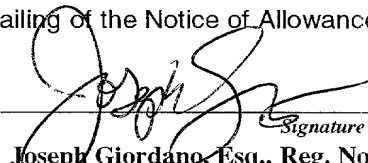
Signature
Joseph Giordano, Esq., Reg. No. 35,158
Telcordia Technologies, Inc.
445 South Street - Room 1G-112R
Morristown, New Jersey 07960

cc:

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **Krishna Kant - Richard C. Lau - Bruce Siegel**

Docket No.

APP 1211-US

Serial No.

Filing Date

Examiner

Group Art Unit

Invention:

Method and ystem for Measuring IP Performance Metrics

I hereby certify that this Application

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Commissioner of Patents and Trademarks, Washington, D.C.

20231-0001 on MAY 26, 2000
(Date)**Linda K. Adams**

(Typed or Printed Name of Person Mailing Correspondence)

(Signature of Person Mailing Correspondence)

EJ398371752US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

METHOD AND SYSTEM FOR MEASURING IP PERFORMANCE METRICS

BACKGROUND OF THE INVENTION

5 The present invention relates generally to computer networks. More particularly, this invention relates to the measurement of network performance.

Communications systems, such as packet networks, are used in various applications for transporting data from one user site to another. At a transmission site in a packet network, data is typically partitioned into one or more packets each of which
10 includes a header containing routing and other information relating to the data. The network then transports the packets to a destination site in accordance with any of several conventional protocols known in the art, such as Asynchronous Transfer Mode (ATM), Frame Relay (FR), High Level Data Link Control (HDLC), X.25, etc. At the destination site, the data is restored from the packets received from the transmission site.

15 The nature of packet switched technology, however, complicates the ability of an Information Technology (IT) manager of an end-user network to monitor the performance of a wide area network (WAN) service provider. The WAN service provider administers a WAN used for transporting data packets originating from customer premises equipment (CPE) in the end-user network across the WAN. Both the customer and the network
20 service provider have an interest in monitoring the performance of the WAN in order to corroborate that the performance conforms with the quality of service "guaranteed" by the WAN service provider.

For example, one type of end-user network is an Internet Protocol (IP) Virtual Private Network (VPN). A VPN includes a set of Virtual Private Links (VPLs), each of
25 which is a communication channel between two customer networks.

Network performance guarantees have emerged as a means for IT managers to ensure that their critical businesses data is delivered in a reliable, consistent manner. The term Service Level Agreements (SLA) refers to these performance guarantees. Common SLA parameters (or metrics) include packet throughput, packet loss ratio (PLR), packet
30 delay, packet jitter, and service availability.

A Measurement Point is the boundary between a host and an adjacent link at which performance reference events can be observed and measured. A source Measurement Point and a destination Measurement Point are two Measurement Points at which packet

traffic is measured. The traffic measured flows between the source and destination Measurement Points, but may originate before the source Measurement Point and may terminate after the destination Measurement Point.

The difference between the packet counts at a source Measurement Point and a destination Measurement Point divided by the packet count at the source Measurement Point for a measured interval of time defines the PLR. The service availability parameter, defined as the percentage of time that the IP service is available, depends on the PLR. One basis for the service availability function is a threshold on the PLR performance. The IP service is available on an end-to-end basis if the PLR for that end-to-end case is smaller than the threshold defined by the customer.

Packet delay is defined as the amount of time it takes for a packet to travel from the source Measurement Point to the destination Measurement Point. The differences between delays for a pair of consecutive packets that are observed at source and destination Measurement Points constitutes a packet jitter metric.

The primary objective of any service provider is to provide a quality service to its customers. Achieving a desired level of quality is not an easy task in light of the complexity of existing network environments. A network environment includes different types of equipment with different types of statistics for measuring performance, making difficult the measurement and correlation of end-to-end statistics.

Existing SLA monitoring devices monitor and collect statistics with respect to a specific technology (e.g., FR) or layer. Such devices, however, do not offer the capability of correlating IP statistics measured at two different points of an IP network that are separated by multiple lower layer networks. Knowing the SLA metrics with respect to a FR network (i.e., a WAN) is not sufficient for reporting end-to-end SLA metrics for a VPN that connects two CPE's.

FIG. 1 illustrates a network 100, which incorporates one such SLA monitoring device. The network 100 includes two CPE's 102 and 104, two Passive Monitors (PMs) 112 and 114, two FR networks 106 and 108, an IP/ATM network 110, two routers 1000 and 1002 and a Data Analyzer (DA) 116. As shown in FIG. 1, the network 100 includes clusters of technology domains (e.g., ATM, FR), which make up the paths for the VPN.

The network 100 of FIG. 1 only shows two nodes of the VPN, namely CPE1 102 and CPE2 104. Each CPE 102 and 104 has an associated, distinct set of IP addresses.

A VPL is established between CPE1 102 and CPE2 104, which are considered end-points of the VPN. Consequently, end-to-end network performance statistics refer to the measurement of the PLR, delay, etc., associated with packets transported from one CPE to another. Although the VPL uses a particular protocol, such as IP, for supporting communication between the two CPEs, the IP packets constituting the VPL can be transported from a CPE to another CPE via intermediate networks that use various lower layer protocols. FR networks 106 and 108 and IP/ATM network 110 exemplify such intermediary networks in the network 100 of FIG. 1. The IP/ATM 110 network refers to either an IP network or an ATM backbone network. Routers 1000 and 1002 are used to connect the IP/ATM network 110 with the FR networks 106 and 108 respectively. The IP/ATM 110 network may include IP routers (not shown).

The PMs 112 and 114 are devices that tap into the network at two different Measurement Points, MP_A and MP_B , to capture FR signals. These PMs are referred to as passive monitoring devices because they collect and store the captured data without changing the packet flow.

The DA 116 is a management console that runs on a PC platform and performs analysis of the data collected by the PMs 112 and 114. The DA 116 produces reports that include SLA metrics associated with the FR network 106. The DA 116 bases the reports on the analysis of the collected data.

The PMs 112 and 114 tap into the FR network 106 through T1 monitoring jacks. The DA 116 is connected to each of the PMs 112 and 114 via an Ethernet network. Once the PMs 112 and 114 capture and store the FR signals, the PMs 112 and 114 send the collected information to the DA 116.

As mentioned above, the DA 116 produces SLA reports for FR traffic statistics, as opposed to IP level traffic statistics. That is, frames are used as the basis for performance measurement, not IP packets. Although not shown, the FR network 106 is also capable of carrying non-IP traffic in the frames. Knowing the SLA metrics with respect to a FR network (e.g., FR network 106), however, is not sufficient for reporting end-to-end SLA metrics for an IP VPN that connects two CPE locations that are on different access

networks. PM 114 cannot be relocated to FR network 108 (i.e., between the FR network 108 and the CPE2 104) to measure end-to-end statistics based on Frame Relay information because the Frame Relay network is not end-to-end. The frames transported on the FR network 108 are not the same (i.e., they have different headers) as those transported on FR network 106.

Although there are PMs available in the market for monitoring IP traffic (rather than just frames or ATM cells) and for enabling the DA 116 to produce SLA reports for IP level traffic statistics relevant to the performance of the VPL established between CPE1 102 and CPE2 104, there still would not be any correlation of IP information at different points of the VPN. The correlation of network statistics is desirable because it allows for scalability in the network 100. That is, correlation of statistics opens the possibility to place any number of PMs at any point in the network in order to obtain end-to-end SLA metrics for a VPN that connects more than two CPE locations. Therefore, there is a need in the art for a performance measurement system that allows the measurement of end-to-end SLA metrics by correlating SLA statistics collected at any two points in a network, which may include a plurality of subnetworks.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to meet the foregoing needs by providing systems and methods for measuring network performance.

Methods and systems consistent with the present invention measure network performance by dividing a stream of packets flowing through a first point into logical frames, where the first point is any point in the network that supports a packet flow. Such methods and systems capture information about the packets in "packages" corresponding to the frames and correlate the contents of each package with packets flowing through a second point, where the second point is any point in the network that supports the packet flow. Network performance information is then calculated based on the correlated packages.

Both the foregoing general description and the following detailed description provide examples and explanations only. They do not restrict the claimed invention.

DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and, together with the description, explain the advantages and principles of the invention. In the drawings,

5 FIG. 1 illustrates a prior art system for measuring the performance of a service provider;

 FIG. 2 illustrates one embodiment of the present invention for measuring network performance in a Virtual Private Network, in accordance with methods and systems consistent with the present invention;

10 FIG. 3 illustrates monitoring devices, in accordance with methods and systems consistent with the present invention;

 FIG. 4 illustrates a source device and a destination device, in accordance with methods and systems consistent with the present invention;

 FIG. 5 illustrates a flowchart of a method for measuring network performance, in
15 accordance with methods and systems consistent with the present invention;

 FIG. 6 illustrates a flowchart of a method for dividing a packet stream into logical frames, in accordance with methods and systems consistent with the present invention;

 FIG. 7 illustrates an implementation of the method of FIG. 6, in accordance with methods and systems consistent with the present invention.

20 FIG. 8 illustrates a flowchart of a method for creating packages corresponding to the logical frames, in accordance with methods and systems consistent with the present invention;

 FIG. 9 illustrates time stamps in a package, in accordance with methods and systems consistent with the present invention;

25 FIG. 10 illustrates the data structure of a package, in accordance with methods and systems consistent with the present invention;

 FIG. 11 illustrates a flowchart of a method for correlating packages and for calculating performance parameters, in accordance with methods and systems consistent with the present invention;

30 FIG. 12 illustrates the data structure of a header storage in a destination device, in accordance with methods and systems consistent with the present invention; and

FIG. 13 illustrates the measurement of packet loss, in accordance with methods and systems consistent with the present invention.

DETAILED DESCRIPTION

Reference will now be made to preferred embodiments of this invention, examples of which are shown in the accompanying drawings and will be obvious from the description of the invention. In the drawings, the same reference numbers represent the same or similar elements in the different drawings whenever possible.

Systems and methods consistent with the present invention measure network performance by monitoring any two points supporting a packet flow in a network. For purposes of the following description, the systems and methods consistent with the present invention are described with respect to an IP packet flow corresponding to a Virtual Private Network. However, the description should be understood to apply in general to any IP packet flow carrying packets that are uniquely identifiable.

In order to measure the performance of a VPN in accordance with the present invention, the packets corresponding to the VPN must be uniquely identifiable. These packets are first monitored at a first point in a network supporting the VPN. Each of the packets includes information that uniquely identifies the packet. This packet information is stored in the memory of a source device for each monitored packet.

The source device selects information related to certain packets and places the selected information in a package. In addition to the packet information, the package includes information regarding the VPN associated with each of the packets in the package. The package is then transmitted to a destination device via an overhead channel. For this discussion source and destination devices are logical entities. A physical measuring device could act as multiple logical devices, sources or destinations (for multiple VPLs).

In addition to receiving packages from the source device, the destination device monitors and stores packets corresponding to the VPN. To accomplish this, the destination device is connected to any other point in the network that supports the VPN whose performance is to be measured. The destination device correlates the packets monitored at this other point in the network with the packages received from the source

device. Finally, the destination device calculates network performance statistics based on the results from the correlation.

FIG. 2 shows in a network 200, which supports a VPN (not shown), a number of points where a monitoring device (MD) may be placed, in accordance with an embodiment of the invention. The network 200 includes CPEs 102 and 104, FR networks 106 and 108, an IP/ATM network 110, routers 1000 and 1002, MDs 212-217, source devices 222, 225 and 226, and destination devices 223, 224 and 227.

The source devices 222, 225 and 226 are electronic devices (e.g., a processor with a memory implementing an algorithm) that divide a stream of IP packets into logical frames, create packages corresponding to the logical frames, and send the packages to the destination devices 223, 224, and 227 as shown by the dotted lines in FIG. 2.

The destination devices 223, 224 and 227 are electronic devices that correlate packages containing packet information associated with packets monitored at first points 236, 235, and 232, with packets monitored at second points 233, 234, and 237. Further, the destination devices 223, 224, and 227 use the results of a given correlation to calculate network performance parameters.

The MDs 212-217 may be technology-specific passive monitors that allow the source or destination device to access IP packets. This allows the source and destination devices to be technology independent. For example, the MDs 212-217 have access to an IP packet flow either when each MD connects to a communication line supporting a stream of FR frames carrying the IP packets, or when each MD connects to a line supporting a stream of ATM cells carrying the IP packets. Once a source or destination device accesses the IP packets, it extracts information about the packets.

The VPN supported by the network 200 includes a VPL between CPE1 102 and CPE2 104. The MDs can be placed at any point in the network 200 that supports a packet flow. The term "packet flow" can refer to a variety of end-to-end communications, including, but not limited to, a VPL (i.e., an IP channel between two IP VPN end-points), a socket connection between two IP hosts, all communications between two IP addresses using a particular protocol, or all communications between two IP addresses. A VPN includes a set of VPLs (one VPL in the example of FIG. 2), where each VPL is an IP

communications channel between two VPN endpoints, for example CPE1 102 and CPE2 104.

The packet flow of interest may include a stream of IP packets that travel across the networks 106, 110 and 108. These IP packets are exchanged between CPE1 102 and CPE2 104. To transport a single IP packet from one end of the FR network 106 or 108 to the other, the FR network 106 or 108 encapsulates the IP packet in one or more frames. At the boundary between FR and ATM, the router extracts the IP packets and encapsulates them in ALL 5 (ATM Adaptation Layer 5) cells to be carried across the ATM network.

As seen in FIG. 2, the MDs 212-217 can be connected to any point in the network 200 that supports the IP flow. The MDs 212-217 do not have to be the same device from an architectural point of view. For example, MDs 212 and 213 could tap into a FR line, while MDs 214 and 215 could tap into an ATM line, where each MD outputs an IP flow.

Furthermore, each MD 212-217 may be designed to operate independent of each other. For instance, MDs 212 and 214 could be manufactured by different companies.

Their function is simply to access frames, cells, etc., for extracting the IP packets. The lack of interdependence between the MDs 212-217 allows a network manager to select a measurement point anywhere in the network supporting the IP flow.

The source-destination device pairings of FIG. 2 allow the performance measurement of the different sections of the network 200. For example, to monitor the performance of the VPN across the FR network 108 and the IP/ATM network 110, the MDs 213 and 216 are located as indicated in FIG. 2. One MD must have a destination device associated with it, while the other must have a source device associated with it. The determination of where to place the destination device and the source device depends on the direction of the packet flow that is to be measured. Assuming that a network manager is interested in measuring the flow of packets sent from CPE2 104 to CPE1 102 at the points indicated by MD 216 and MD 213, the source device 226 is connected to the MD 216 and the destination device 223 to MD 213.

The source device 226 captures IP packets corresponding to the packet flow between CPE2 104 and CPE1 102. MD 216 provides these packets to the source device 226 where they are captured. These packets travel through FR network 108 and through IP/ATM network 110 before being monitored by MD 213. Destination device 223

captures or accesses information related to the packets monitored by MD 213 and stores the captured information in a memory (not shown). The packets further travel across FR network 106 to finally arrive at CPE1 102, establishing a communication channel between CPE1 102 and CPE2 104.

5 The source device 226 divides the captured packets into logical frames and creates packages corresponding to such frames. The packages include headers from the captured packets. The source device 226 sends these packages to the destination device 223 via an overhead channel (see dotted line connecting source 226 and destination device 223 in FIG. 2). The overhead channel is a reliable path (e.g., a TCP connection) over which
10 monitoring information is transmitted. Packet headers sent from any source device to any destination device via the overhead channel will not suffer packet loss or out of order packet degradation. The destination device 223 receives these packages and correlates them with the stored packets (accessed by MD 213). The destination device 223 uses information from the correlated packages to produce SLA metrics, such as the number of
15 packets lost across the networks 110 and 108 (the monitored networks) and the delay experienced by packets that travel across such networks. Accordingly, the methods and systems consistent with the present invention take advantage of the passive monitoring of the packet flows by the MDs to produce an accurate packet loss measurement in real-time. That is, the SLA metrics are calculated by the destination device 223 in real-time, as
20 opposed to being produced by a central facility (such as DA 116 in FIG.1) that must process captured packet information off-line.

 Another evident advantage of the system of FIG. 2 is that it provides end-to-end SLA metrics by placing a source device 222 and a destination device 227 (along with the respective MDs 212 and 227) at the boundaries of CPE1 102 and CPE2 104, respectively.
25 It will become apparent from the discussion that follows that the package transmission scheme of the present invention does not require an extraordinary number of bits sent over the overhead channel from an IP packet to perform the correlation and calculate the performance parameters. For this same reason (low overhead), the system comprised of the source-destination device pairings [222, 224], [222,227],[225,224], and [226,223] has
30 a scalable architecture. Because each pairing of source-destination device requires only a

small amount of network bandwidth, many pairings can be placed in the network 200 without significant impact on performance of the network 200.

The source-destination device pairing system architecture is also scalable with respect to the number of different flows that can be monitored. Each source or destination
 5 device can filter packets based on VPN or other criteria. This capability allows a destination device to be placed in the middle of the network 200 as well as the edge and allows the destination device to produce SLA metrics for multiple VPNs or other flows simultaneously.

FIG. 2 also shows a single destination device 224 receiving packages from
 10 different sources 222 and 225. The purpose of this configuration is to monitor the performance of different sections or sub-networks of the network 200.

FIG. 3 illustrates a simplified block diagram of a source-destination device pair, which monitors a packet flow across a network 302, in accordance with an embodiment of the invention. The block diagram of FIG. 3 shows a Monitoring Device (MD) 212, source
 15 device 222, destination device 227, and Monitoring Device 217. The MDs 212 and 217 need not be of the same technology.

The network 302 includes a set of sub-networks (e.g., FR, ATM, etc.) and supports a VPN. The packet flow corresponding to the VPN is monitored by MDs 212 and 217 at points MP_A and MP_B . In this embodiment, network 302 may include thousands of VPNs,
 20 other than the VPNs of interest, supported through MP_A and MP_B .

MD 212 connects to a communications line that supports the packet flow at point MP_A and also connects to the source device 222. The source device 222 connects to the destination device 227 via an overhead channel. The destination device 227 connects to MD 217. MD 217 connects to another communications line that supports the same packet
 25 flow at point MP_B .

The packet flow is indicated by the arrows 301 and 303 in FIG. 3. Some of the packets that travel across the network 302 may be lost, while others may experience delay, jitter, etc. The destination device 227 determines in real-time the performance of the network 302 by calculating the packet loss, delay, etc. introduced by the network 302.
 30 FIG. 3 shows the relationship mentioned above between the packet flows 301 and 303 and the direction 304 of the package transmission.

FIG. 4 shows a detailed block diagram of source device 222 and destination device 227, in accordance with an embodiment of the invention. FIG. 4 shows a source network 442 (for example, CPE1 in FIG. 1), intermediate network 402, source device 222, a monitored network 302, destination device 227, intermediate network 404, and destination network 104 (for example, CPE2 in FIG. 1). The intermediate networks 402 and 404 are shown to illustrate that the source and destination devices monitoring a particular IP flow need not be placed immediately adjacent to the source and destination of that flow. The monitored portion of the network need not be end-to-end.

The source device 222 shown in FIG. 4 includes a processing device having functional modules 410-420. The functional modules in the source device 222 include a clock 410, a packet capture module 411, a VPN database 412, a packet duplicate counter 413, a packet filter 414, a packet counter 415, a header storage 417, a package sender 418, and a framer 419. The functional modules of the destination device 227 are similar to those in the source device 222, except that the destination device 227 does not include a package sender module 418. The destination device 227 includes a package receiver module 416 and a statistics agent 420, and the framer 421 has a different functionality than the framer 419 in source device 222.

The packet capture module 411 obtains packets from MD 212 (shown in FIG. 2). The VPN database 412 includes information about the VPNs from which SLA parameters are measured. In a business application, two companies might each use a VPN for satisfying their communications needs. If both companies desire to obtain SLA metrics by using the destination device 227, then the database 412 must have information identifying each of the VPNs, such as a VPN identifier associated with the companies. If only one company is interested in obtaining the metrics, then the database 412 includes the VPN identifier corresponding to that company's VPN.

The packet filter 414 uses information from the VPN database to filter the headers of packets captured by the capture module 411. That is, the packet headers that form a logical frame from which a package is based are those that are part of a particular VPN. The formation of logical frames is discussed below with reference to FIG. 6 and FIG. 7.

The header storage 417 stores the filtered headers. The clock 410 provides the time (e.g., a time stamp) at which the headers are accessed or captured. The time of capture is stored in the header storage 417 as part of the corresponding header information.

The packet counter module 415 counts the filtered headers. The duplicate counter 413 keeps a count of the number of duplicate headers in the packet flow before the headers arrive at point MP_A . When the packet filter 414 selects a header that is the same as a previously selected header, the duplicate counter 413 is incremented. The incremented duplicate count information in the counter 413 is then included in the package. Up to this point, both the source device 222 and the destination device 227 perform the same functions with regards to capturing and storing a packet.

The framer 419 in the source device 222 selects a number of headers in the header storage 417 to form a logical frame. The number of headers selected constitutes the logical frame size. The package sender 418 selects a number of headers in the logical frame to form a package. The package sender 418 transmits this package to the destination device 227 via an overhead channel.

The package receiver module 416 in the destination device 227 waits for packages to arrive from the source device 222. When the package receiver 416 receives a package, it sends the package to the framer 421. The framer 421 searches for a match between a header in the received package and headers stored in the header storage 417 of the destination device 227. When the framer 421 finds a match, framer 421 uses this match to calculate a destination frame size. The framer 421 uses the earliest package-packet match as the start of the destination frame. The combination of the package-packet match and the calculation of the destination frame size represents the correlation between a package and packets monitored at destination device 227.

The framer 421 supplies the calculated frame-size to the statistics agent 420. The statistics agent 420 uses the frame-size information, the headers in header storage 417 (of destination device 227) that matched header information in packages, and information contained in the packages (e.g., time stamps) to calculate network performance statistics.

FIG. 5 illustrates a flowchart of the steps performed by blocks 222 and 227 for measuring network performance, in accordance with an embodiment of the invention. Step 502 includes dividing a stream of packets flowing through a first point (e.g., MP_A in

FIG. 3) into logical frames. Step 504 includes creating packages corresponding to the logical frames. For example, the source device 222 of FIG. 4 may perform the steps 502 and 504.

Step 506 includes correlating each package received with packets captured at a second point in the network (e.g., MP_B in FIG. 3). Finally, step 508 includes calculating the network performance parameters based on correlation information (including the headers that were matched) and package information. For example, the destination device 227 of FIG. 4 may perform the steps 506 and 508. While the flowchart of FIG. 5 shows a single run through the steps comprising the method of the present invention, an implementation of the same should be in the form of a continuous loop in, order to perform the operations in real-time.

FIG. 6 illustrates a flowchart that implements step 502 in FIG. 5 as well as duplicate packet count and packet count functions. Step 602 includes capturing an IP packet header. Step 604 includes filtering the captured header by VPN or other type of IP-flow. Step 604 includes selecting the header of the captured packet for further processing if the header corresponds to the packet flows for which SLA metrics are calculated. If the captured packet is not associated with a packet flow of interest, the packet is filtered out (e.g., discarded). FIG. 7 illustrates an embodiment in which all of the packets shown are part of packet flows of interest (i.e., no captured packet is discarded).

Once the header is selected and associated with a VPN, a packet count associated with that VPN is incremented (step 606). Step 608 includes searching for headers in the local header storage to detect duplicates. Step 610 includes determining whether the selected header is found in the header storage. If no duplicates are found, then the selected header is stored in a header storage location associated with the VPN corresponding to the header (step 614). If a duplicate header is found in the header storage, a duplicate packet count increments (step 612) and the selected header is stored as described above with respect to step 614. The duplicate packet count is stored in another memory location and is included as part of the information contained in a package. The package creation process will be described with respect to FIG. 8.

The method of FIG. 6 is performed continuously. The method is performed when all of the steps disclosed in FIG. 6 have been carried out, and the flowchart points back to reinitiate the process with the capture packet header step 602.

The destination device 227 also performs the same steps disclosed in FIG. 6. This method is carried out in the destination device 227 in order to capture headers at the second point in the network (MP_B), and thus creating a data structure with information obtained from the packet flow.

FIG. 7 shows one implementation of FIG. 6, where packets in a packet trace are captured by the packet capture module 411 at measuring point MP_A , in accordance with an embodiment of the invention. FIG. 7 illustrates a packet flow 700, a measurement point MP_A , a packet capture module 411, a packet filter module, and a header storage 714. The packet trace includes packets corresponding to three packet flows of interests VPN1, VPN2 and VPN3. In this example, no packets are discarded by the packet filter since all packets in this packet trace belong to one of the VPNs. In general, this may not be the case.

All three flows in the packet trace travel in the same direction, as indicated by the arrow 701. Note that packet IP10 in the packet trace is duplicated, as indicated by the numeral 702.

The filter 414 selects headers from the captured packets and groups them under their corresponding VPN. The logical column identified by VPN1 stores the headers associated with a VPN identifier corresponding to VPN1. Similarly, the logical columns identified by VPN2 and VPN3 store headers associated with their respective VPN identifiers.

FIG. 7 shows that the headers H1-H35 in storage locations of data structure 714 are stored in their corresponding logical columns according to the order in which they are captured. Alternatively, the information about the order in which the headers are captured can also be obtained by assigning a time stamp or sequence number to each header.

There is a total of two logical frames in FIG. 7 for each VPN. The logical frame for VPN1 includes the header sequence H2H4H5H7H13. The logical frame size of frame 706 is six. Each logical frame created has associated with it a logical frame number as shown in FIG. 7.

Both of the duplicate headers 712 corresponding to the duplicate packets 702 are stored in the header storage location in the data structure 714. A package corresponding to the logical frame 706 corresponding to the VPN2 includes the number of duplicate packets, but not necessarily the duplicate headers 712 themselves.

- 5 A package corresponding to the logical frame 706 of VPN2 includes a predetermined number 704 of headers in the logical frame. In the present example, the number of headers is three. This package includes the sequence of headers H3H6H9.

The package further includes the number 704 of headers in the package, the logical frame size, the logical frame number of the frame corresponding to the package, and the
10 VPN identifier (e.g., VPN2, etc.). The package further includes a flow identification number. The flow identification number is not shown in FIG. 7 because the example illustrated therein assumes a single flow per VPN.

Further, the package includes the number of duplicate packets in a logical frame. Note that in the present example none of the duplicate headers in the logical frame are
15 included in the package.

FIG. 8 illustrates a flowchart for implementing step 504 in FIG. 5 (i.e., creating packages corresponding to the logical frames), in accordance with an embodiment of the present invention. Step 802 includes retrieving the s last (or most recently captured) number of headers from a particular VPN (or from an IP packet flow associated with a
20 VPN) from the appropriate header storage. The number s is configured by a user and assumes a value of three in FIG. 7.

Step 804 includes creating a package. The package is a sequence of bits that corresponds to the s headers, the source frame size (i.e., the size of logical frame in FIG. 7), a duplicate packet count, and other information specific to the VPN (e.g., VPN
25 identifier and packet flow identifier).

Step 806 includes sending the package that corresponds to the VPN (or IP packet flow in the VPN) to the destination device 227. Step 808 includes waiting x number of seconds before creating a new package, where x may be configured by the user. x is defined as the sampling time for a VPN, and is the difference between the time at which a
30 packet capture module in the source device 222 starts capturing packets to form a logical frame corresponding to that VPN and the time at which the packet capture module starts

capturing packets to form the next logical frame corresponding to that VPN. Assuming that a logical frame is created within a time period that is less than the sampling time, the number x represents the sampling time.

FIG. 9 illustrates the time stamps in a package, in accordance with an embodiment of the invention. FIG. 9 shows a logical frame 901 and its corresponding package 905, a second package 907 sent after package 905, and time stamps 912-915.

The frame 901 includes a frame number i (Frame i , 902) associated with it as well as a frame size (FS(i), 904). Package 905 includes a package number i (Package i , 906) that is the same as the frame number 902 of the corresponding frame. Package 907 includes a package number (Package $i+1$, 908) that is greater than the package number 906, indicating that package 907 is transmitted after package 905.

FIG. 9 shows only the header information in the packages. This is done for illustrative purposes to show that the package size s is the number of headers 910 in the package and does not take into account any other information that may be included in the package. Each header is represented by a vertical line in the package and corresponds to the header information fields 1006-1009 in FIG. 10.

Each header information field has an associated time stamp (TS). The TS is the time at which the packet containing the header was captured. The TS for the first captured header in package 905 is TS($i,1$) 912, while the TS for the second captured header in package 905 is TS($i,2$) 913. Similarly, the TS for the first captured header in package 907 is TS($i+1,1$) 912, while the TS for the second captured header in package 907 is TS($i,2$) 913. TS 912 represents the earliest time while TS 915 represents the latest time.

FIG. 10 illustrates a data structure of a package, in accordance with an embodiment of the present invention. The source device 222 sends the package to the destination device 227. The information fields in the storage locations include a flow identifier 1003, a frame number 1004, the package size 1005, and header information fields 1006-1009, which include time stamps.

If a VPN has different packet flows associated with it, the packet flow identifier information is inserted in field 1003. The network performance is measured in the destination device 227 for the packet flow indicated in the package 1003.

The frame number 1004 is simply the logical frame number from which the package is created. The package size field 1005 contains the number of headers in the package.

The header information fields 1006-1009 include IP header information as well as time stamps. The IP header information includes the source address, destination address, IP identifier, fragment flag, fragment offset, a locally-generated sequence number, and a running duplicate count. The running duplicate count reflects the duplicate packets entering the monitored network as opposed to the number of packets duplicated as a result of passing through the monitored network.

The IP header information is used for synchronization and frame alignment. Synchronization refers to the identification of the same IP packets observed from the two Measurement Points of the IP VPN. One way to achieve synchronization is to find some way to uniquely identify an IP packet. Conventional techniques use a cyclic redundant checksum (CRC) calculated over the entire IP packet to uniquely identify packets for matching purposes. The disclosed method does not require CRC computation and thus saves substantial processing time. For example, for a properly constructed IP stream, a combination of the source and destination IP addresses (32 bits for each), the IP identifier field (16 bits), the fragment flag (3 bits), the fragment offset (13 bits), and the source and destination port numbers uniquely identifies an IP packet within a VPN. The IP identifier is unique within the IP flow identified by the source and destination addresses if there is no fragmentation. If there is fragmentation along the VPN path, a fragment offset and a fragment flag may also be needed to uniquely identify the packet. Additional processing may be required to account for any fragmentation that occurs along the VPN path.

FIG. 11 illustrates a flowchart for implementing steps 506 and 508 in FIG. 5 (i.e., correlating packages with packets captured by the destination device 227 and calculating network performance parameters based on the correlation), in accordance with an embodiment of the invention. Step 1102 includes waiting for a package to arrive from the source device 222. Once a package arrives from the source device 222, the destination device 227 searches for headers in its header storage that match the headers in the received package (step 1104). As mentioned above, the destination device 227 uses a method that is identical to that illustrated in FIG. 6 in order to capture packets at a second point in the

network and to store the corresponding headers in the header storage. The destination device 227 starts to capture headers at an arbitrary point in time. In one embodiment, a hash table (hashed on the IP identifier) is the data structure used to store headers at the destination monitor. This data structure facilitates efficient matching, as required by step

5 1104.

If the destination device 227 finds headers in its header storage that match the headers in the received package (step 1106), then the destination device 227 calculates the destination frame size (step 1108). The destination frame size is the number of packets in between a first match of a previously received package with a header stored in the destination device 227 and a first match of a presently received package with another header stored in the destination device 227. Matching the packages to the headers and calculating the destination frame size constitutes the correlation step in FIG. 5.

Step 1110 includes calculating network performance statistics using the calculated frame-size, the matched packets in the destination device 227 header storage, and other information contained in the package. To calculate the number of packets lost when traveling from one point (e.g., MP_A in FIG. 3) to another (e.g., MP_B in FIG. 3), the destination device 227 uses the following formula: $source_frame_size - (calculated_destination_frame_size - calculated_duplicate_count)$. The "source_frame_size" is the frame size included in the package (1005 in FIG. 10). The "calculated_duplicate_count" is the number of packets duplicated between the source and destination Mps; its calculation is discussed in detail below. This information can then be used to calculate the availability of the VPN. Specifically, the availability is computed as the percentage of the total time that the packet loss exceeds a given level. The time resolution of the availability is limited by the frequency of the loss computation.

Every IP packet is associated with a time stamp that is local to the monitoring devices. The difference between the time stamps corresponding to the same packet at MP_A and MP_B gives the delay from MP_A to MP_B for that IP packet. Because the time stamps are local to the monitoring devices, the accuracy of this delay measurement depends on the synchronization of the two devices. This information can then be used to calculate average delay as well as jitter.

Another performance statistic calculated in step 1110 is the number of packets that duplicate when passing through the monitored network. There might be two instances when the IP packets duplicate. The first such instance is when the packet is between points MP_A and MP_B . The second such instance is before the packet flow hits the monitoring device (at MP_A) associated with the source device 222. The performance parameter of interest is the number of duplicate packets that results from the transport of the packet flow through the monitored network. To calculate the parameter, the source device 222 keeps a running count of the number of duplicate packets that are entering the monitored network (second instance). The destination device 227 also keeps a running count of the number of duplicates passing by the measurement point MP_B . The destination device 227 count is independent from the source device 222 count. The destination device 227 uses the running duplicate counts to calculate current-frame duplicate counts for both the source and destination MPs. The destination device 227 duplicate count represents the number of packets that are duplicated before reaching MP_A and the number of packets that are duplicated in the monitored network, since the destination device 227 has no way of independently distinguishing between packets duplicated before entering the monitored network and packets duplicated within the monitored network. The destination device 227 simply subtracts the source device 222 current-frame duplicate count from the destination device 227 current-frame duplicate count to determine the duplicates created by the monitored network for the current frame.

FIG. 12 shows a header storage data structure 1200 in the destination device 227, in accordance with an embodiment of the invention. The data structure contains a VPN identifier field 1201, a flow identifier 1202, last frame number field 1203, packet index FB 1204, packet index FC 1205, the number of duplicate packets 1206, and headers 1207-1211.

The flow identifier 1202 was discussed above with reference to FIG. 10. The last frame number field 1203 is the frame number (1004 in FIG. 10) corresponding to the most recently received package.

The packet index FB 1204 refers to the locally-generated sequence number of a packet at the start of the current destination frame. The packet index FB is the reference point (first match) from which the destination frame size is calculated.

The packet index FC 1205 refers to the locally-generated sequence number of the packet that is most recently recorded by the destination device 227. When a packet match is found in the current package, the destination frame size is calculated as the difference between the sequence number of the matched packet and index FB. This currently-
5 matched sequence number then becomes the new "index FB" for use in calculating the next destination frame size.

Field 1206 represents the running duplicate count at the start of the current frame. The running duplicate count field in lines 1207-1211 is the running duplicate count at the time of arrival of the respective packet.

10 Finally, the labels 1207-1211 represent the headers stored in the destination device 227 header storage area. The number of headers that are stored in the destination device 227 may differ from the number of headers stored in the source device 222 for reasons that follow.

The logical framing algorithm runs periodically at the source device 222 with a
15 separate process running for each monitored packet flow. At the destination device 227, the destination framing algorithm is triggered by the periodic reception of packages from the source device 222. Each package corresponds to a specific IP packet flow and invokes a separate destination process.

For a specific IP packet flow, the source device 222 gathers the most recent s
20 headers after a specified amount of time (sampling time) since the last iteration of the framer. The header information is placed in a package that is sent to the destination device 227. The current source frame is defined by the source device 222 as ending with the header preceding the first header included in the package. The next source frame is consequently defined as starting with the first header included in the package. Included in
25 the package is information identifying the IP packet flow and information pertaining to the current frame, such as a packet count, duplicate count, and frame number.

When the package is received at the destination device 227, the destination framing algorithm begins. The first step is to match one of the package headers with the headers stored locally at the destination device 227. Due to the nature of the intervening IP
30 network, the headers stored at the destination device 227 corresponding to the package may be out of order with respect to the sequence of package headers or missing. To

compensate for this, the goal is to find as many of the package headers in our local storage as possible. This is the reason that the number of headers 1207-1211 may be greater than the number of headers in the source device 222. The destination device 227 selects the one header for which the matched header in local storage is the earliest received header.

- 5 This header is defined by the destination device 227 as ending the current destination frame and starting the next destination frame (in particular, this header belongs to the next destination frame). The destination device 227 can now independently calculate various destination frame statistics, such as packet count, duplicate count, etc. These statistics are then compared to the analogous statistics of the current source frame received in the
- 10 package to calculate various network performance statistics.

- FIG. 13 illustrates a high-level diagram of a packet loss measurement, in accordance with an embodiment of the invention. The destination device 227 is only concerned with lost packets. One can then designate the frame size of n packets, delineated by two framing patterns, F_1 and F_{n+2} , at MP_A . A framing pattern may include a sequence
- 15 of bits corresponding to the source address, destination address, IP identifier field, fragment flag, and fragment offset of the headers. When the same two framing patterns are observed at MP_B with a packet count of m packets between them, the packet loss count of n minus m packets can then be computed.

- The foregoing description of preferred embodiments of the present invention
- 20 provides an exemplary illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention.

WHAT IS CLAIMED IS:

1. A method for measuring network performance, comprising:
dividing packets flowing through a first point into frames, the first point being any point in the network that supports a packet flow;
5 capturing information about the packets in packages that correspond to the frames;
correlating each package with packets flowing through a second point, the second point being any point in the network that supports the packet flow; and
calculating network performance information based on the correlated packages.
- 10 2. The method of claim 1, wherein the dividing step comprises:
selecting a header associated with the packets flowing through the first point;
associating the header with the packet flow; and
storing the header in a storage associated with the packet flow.
- 15 3. The method of claim 2, wherein the dividing step further comprises:
incrementing a packet count; and
detecting duplicate packets.
4. The method of claim 3, wherein the detecting step comprises searching in the
20 storage for another header that matches the selected header.
5. The method of claim 3, wherein a duplicate packet count is incremented when a duplicate packet is detected.
- 25 6. The method of claim 2, wherein the storing step is repeated to form a sequence of headers in the storage.
7. The method of claim 6, wherein the step of storing the header further comprises:
storing header order of capture information in a second storage associated with the
30 selected header.

8. The method of claim 6, wherein the headers in the storage are stored in the form of a hash table data structure.

9. The method of claim 1, wherein the packets are Internet Protocol packets.

5

10. The method of claim 1, wherein the step of capturing information comprises: retrieving consecutive headers from a frame; and

forming a package including information that uniquely identifies consecutive packets corresponding to the consecutive headers.

10

11. The method of claim 10, wherein the step of forming a package further comprises:

setting the package size to represent the number of packet headers in the package.

15

12. The method of claim 10, wherein the step of forming a package further comprises:

selecting a source information, a destination information, an Internet Protocol identifier, a fragment flag, and a fragment offset from each packet in the package as the information that uniquely identifies consecutive packets corresponding to the consecutive

20

headers

13. The method of claim 10, wherein the step of retrieving consecutive headers further comprises:

assigning a time stamp and locally-generated sequence number to each of the consecutive headers.

25

14. The method of claim 10, wherein the step of retrieving consecutive headers further comprises:

retrieving last n headers in the frame, n being an integer number.

30

15. The method of claim 1, further comprising:

storing in a storage a header associated with the packets flowing through the second point.

5 16. The method of claim 15, wherein the storing step comprises:
selecting the header;
associating the header with the packet flow; and
storing the header in a storage location associated with the packet flow.

10 17. The method of claim 16, wherein the step of storing the header further
comprises:
incrementing a packet count; and
detecting duplicate packets.

15 18. The method of claim 17, wherein the detecting step comprises:
searching in the storage for another that matches the selected header.

19. The method of claim 17, wherein a duplicate packet count is incremented when a duplicate packet is detected.

20 20. The method of claim 15, wherein the step of storing the header in a storage
location is repeated to form a sequence of headers in the storage and further comprises:
storing header order of capture information in a second storage, the second storage
being associated with the selected header.

25 21. The method of claim 1, wherein the correlating step comprises:
associating each package with the packet flow;
searching for a match between packet information selected in each package and
stored header information corresponding to the packet flow; and
calculating a destination frame size.

30

22. The method of claim 21, wherein the step of calculating a destination frame size comprises:

determining a number of packets in between a match of a previous package and a match of a present package.

5

23. The method of claim 21, wherein the searching step comprises examining a number of stored packet headers in the storage.

24. The method of claim 1, wherein the step of calculating network performance
10 comprises:

determining a number of packets lost between the first point and the second point in the network.

25. The method of claim 24, wherein the step of determining the number of
15 packets lost comprises:

determining a source frame size from a correlated package;

calculating a destination frame size;

subtracting the destination frame size from the source frame size; and

20 adding a number of duplicate packets generated between the first point and second point in the network to the subtraction of the destination frame size from the source frame size.

26. The method of claim 1, wherein the step of calculating network performance
25 comprises:

determining a delay experienced by a packet flowing from the first point to the second point in the network.

27. The method of claim 26, wherein the step of determining the delay comprises:
30 determining a first time at which a packet associated with a correlated package flows through the first point in the network;

determining a second time at which the packet flows through the second point in the network; and

subtracting the first time from the second time.

5 28. The method of claim 1, wherein the step of calculating network performance comprises:

calculating a number of duplicate packets created between the first point and the second point.

10 29. The method of claim 28, wherein the step of calculating the number of packet duplicates comprises:

counting duplicate packets at the first point;

counting duplicate packets at the second point; and

15 subtracting the count of duplicate packets at the first point from the count of duplicate packets at the second point.

30. A method for measuring network performance, comprising:

retrieving packet headers from a first class of packets at a first point in the network, the first point being any point in the network that supports a flow of either the first class of packets or a second class of packets carrying information corresponding to the packets of the first class;

20

selecting packet headers retrieved at the first point that correspond to a packet flow;

maintaining a first header storage to store the selected headers as the first class of packets flow through the first point;

25

retrieving packet headers from the first class of packets at the second point in the network, the second point being any point in the network that supports a flow of either the first class of packets or the second class of packets;

30 selecting packet headers retrieved at the second point that correspond to the packet flow;

maintaining a second header storage to store the selected headers as the first class of packets flow through the second point;

creating a package including information from the first header storage;

5 sending the package to a monitor associated with the retrieval of packet headers at the second point;

correlating the package with information from the second header storage; and

calculating network performance information using a result of the correlation.

31. A system for measuring network performance comprising:

10 at least a first and a second monitoring device for monitoring packets associated with a plurality of packet flows and connected to any point in the network; and

at least a first and a second processing device for determining network performance information, each processing device respectively connected to each of the first and second monitoring devices.

15

32. The system of claim 31, wherein the first processing device comprises a source device that divides packets accessed via the first monitoring device into frames and captures information about the packets in packages corresponding to the frames; and the second processing device comprises a destination device that correlates each package with
20 packets accessed via the second monitoring device and that calculates the network performance information based on the correlated packages; wherein the monitoring devices monitor a packet flow from the plurality of packet flows.

33. The system of claim 32, wherein the source device includes a processor for
25 selecting a header associated with the packets accessed via the first monitoring device, for associating the header with the packet flow, and for storing the header in a storage.

34. The system of claim 32, wherein the captured information about the packets comprises:

30 source information;

destination information;

an Internet Protocol identifier;
a fragment offset; and
a fragment flag.

5 35. The system of claim 32, wherein the packages include running duplicate packet count, locally-generated sequence number, and locally-generated time stamp information for each packet in the package.

 36. The system of claim 32, wherein the packages include a packet flow identifier,
10 a frame number, and a package size.

 37. A method for measuring performance of a network, said method comprising the steps of:

 dividing packets flowing through a first point into frames, the first point being any
15 point in the network that supports a packet flow;
 collecting information about the packets and the frames;
 correlating the collected information with packets flowing through a second point,
the second point being any point in the network that supports the packet flow; and
 calculating the performance of the network based on the correlated information.

20

 38. A method for measuring performance of a network, said method comprising the steps of:

 dividing packets flowing through a first point into frames, the first point being any
point in the network that supports a packet flow;
25 receiving information about the packets and the frames;
 correlating the received information with packets flowing through a second point,
the second point being any point in the network that supports the packet flow; and
 calculating the performance of the network based on the correlated information.

30 39. The method of claim 38, wherein the step of receiving information comprises:

receiving packages that correspond to the frames and that include information about the packets and the frames.

40. A method for measuring performance of a network, said method comprising
- 5 the steps of:

dividing packets flowing through a first point into frames, the first point being any point in the network that supports a packet flow; and

- capturing information about the packets and frames, such that the information is correlated with packets flowing through a second point in the network that supports the
- 10 packet flow.

41. The method of claim 40, wherein the step of capturing information comprises: capturing information about the packets in packages that correspond to the frames.

009250" 1/56/560

ABSTRACT

A method and system is provided for measuring network performance. The method and system divides a stream of packets flowing through a first point into frames, the first point being any point in the network that supports a packet flow, creates packages
5 corresponding to the frames, correlates each package with packets flowing through a second point, the second point being any point in the network that supports the packet flow, and calculates network performance information based on the correlated packages.

09579371 052600

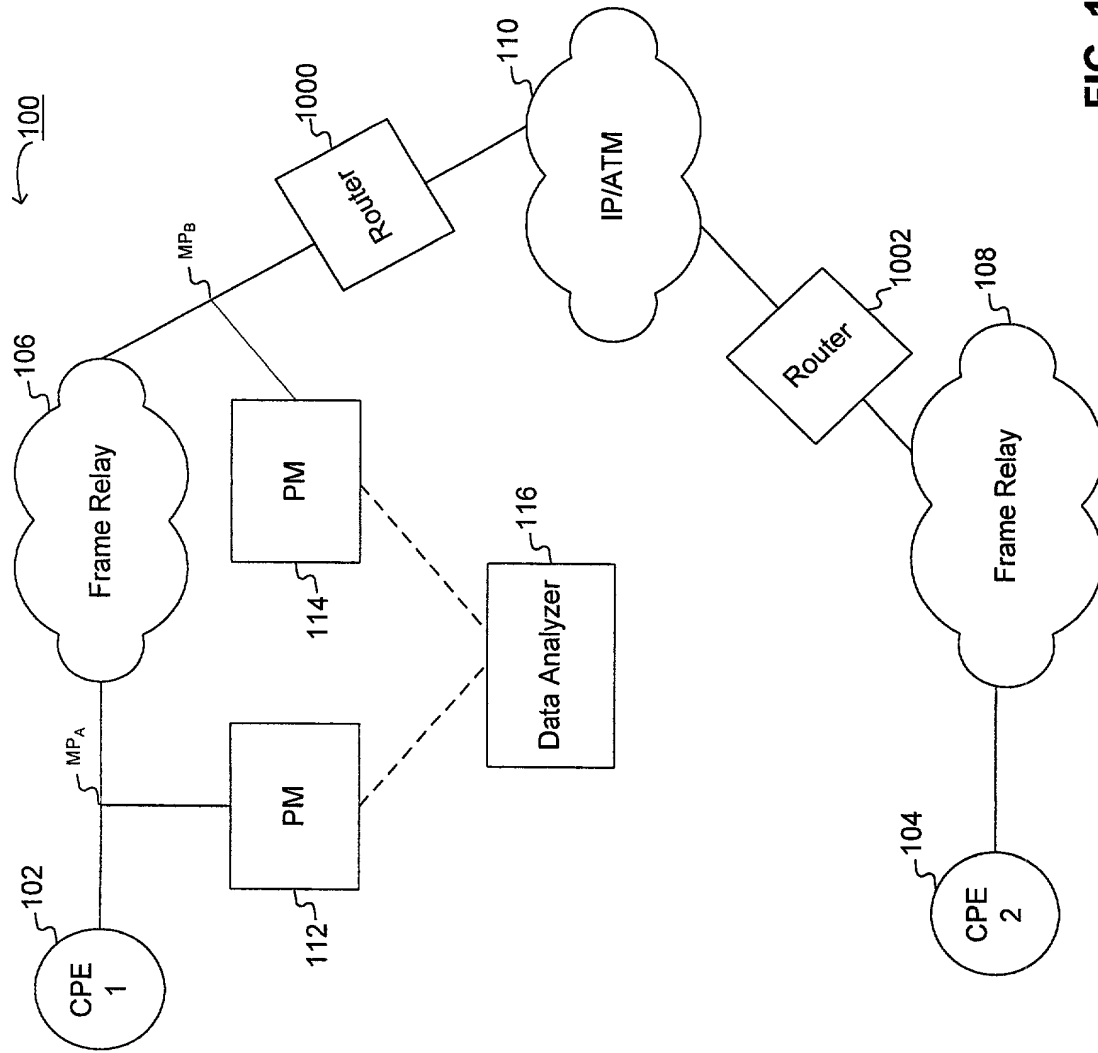


FIG. 1
PRIOR ART

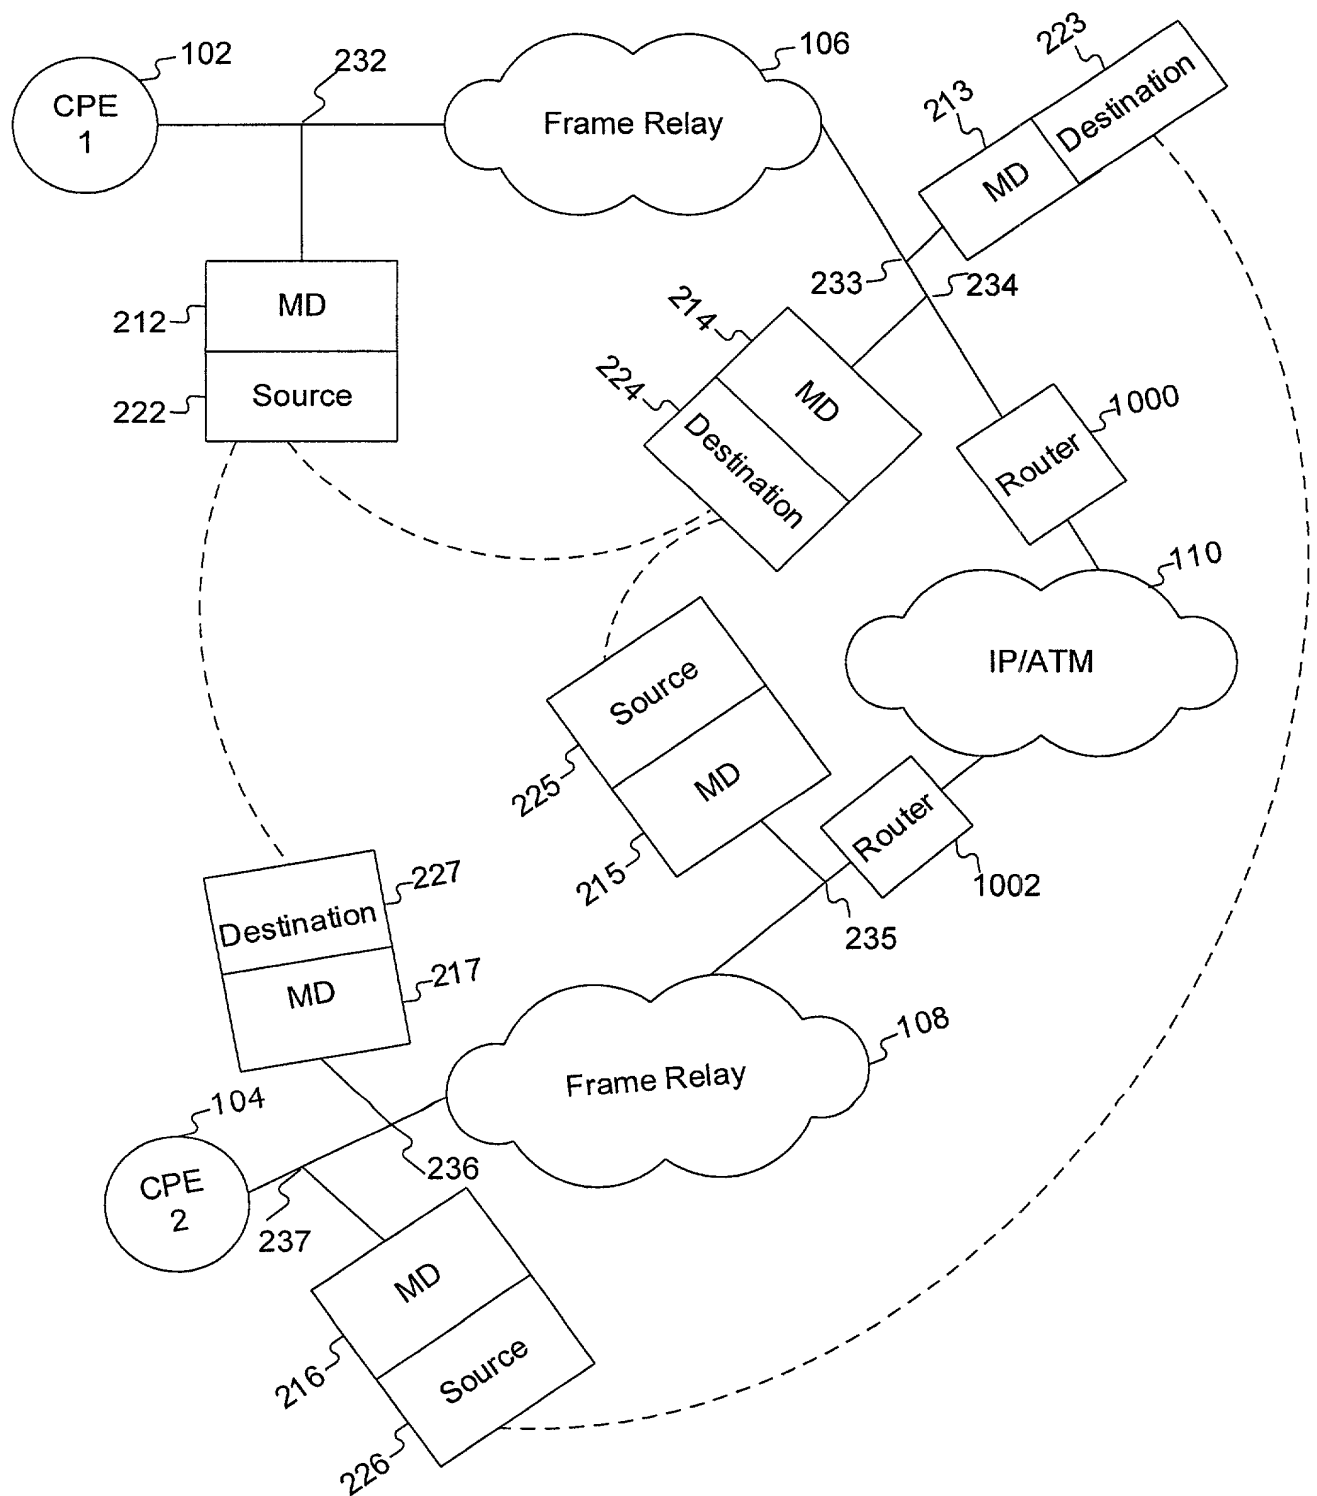


FIG. 2

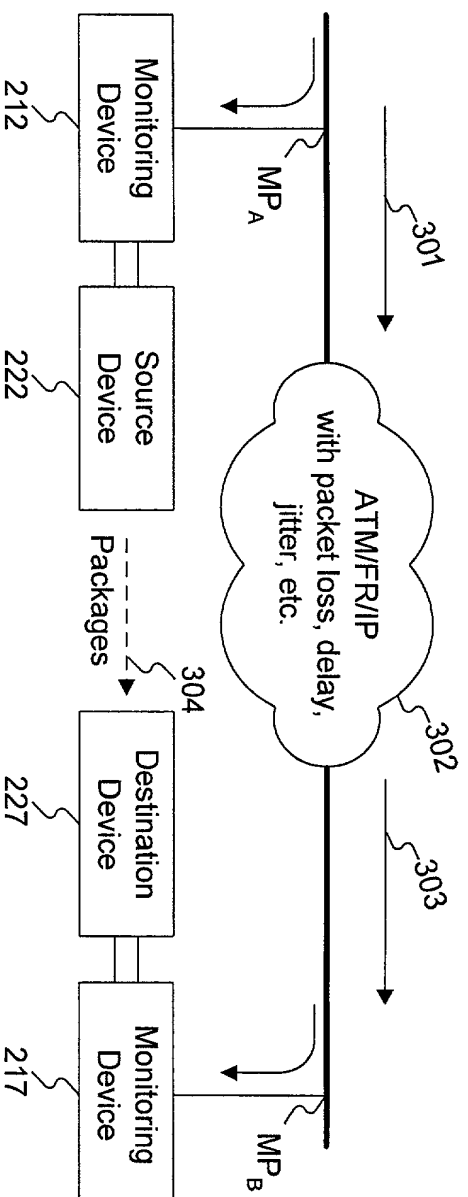


FIG. 3

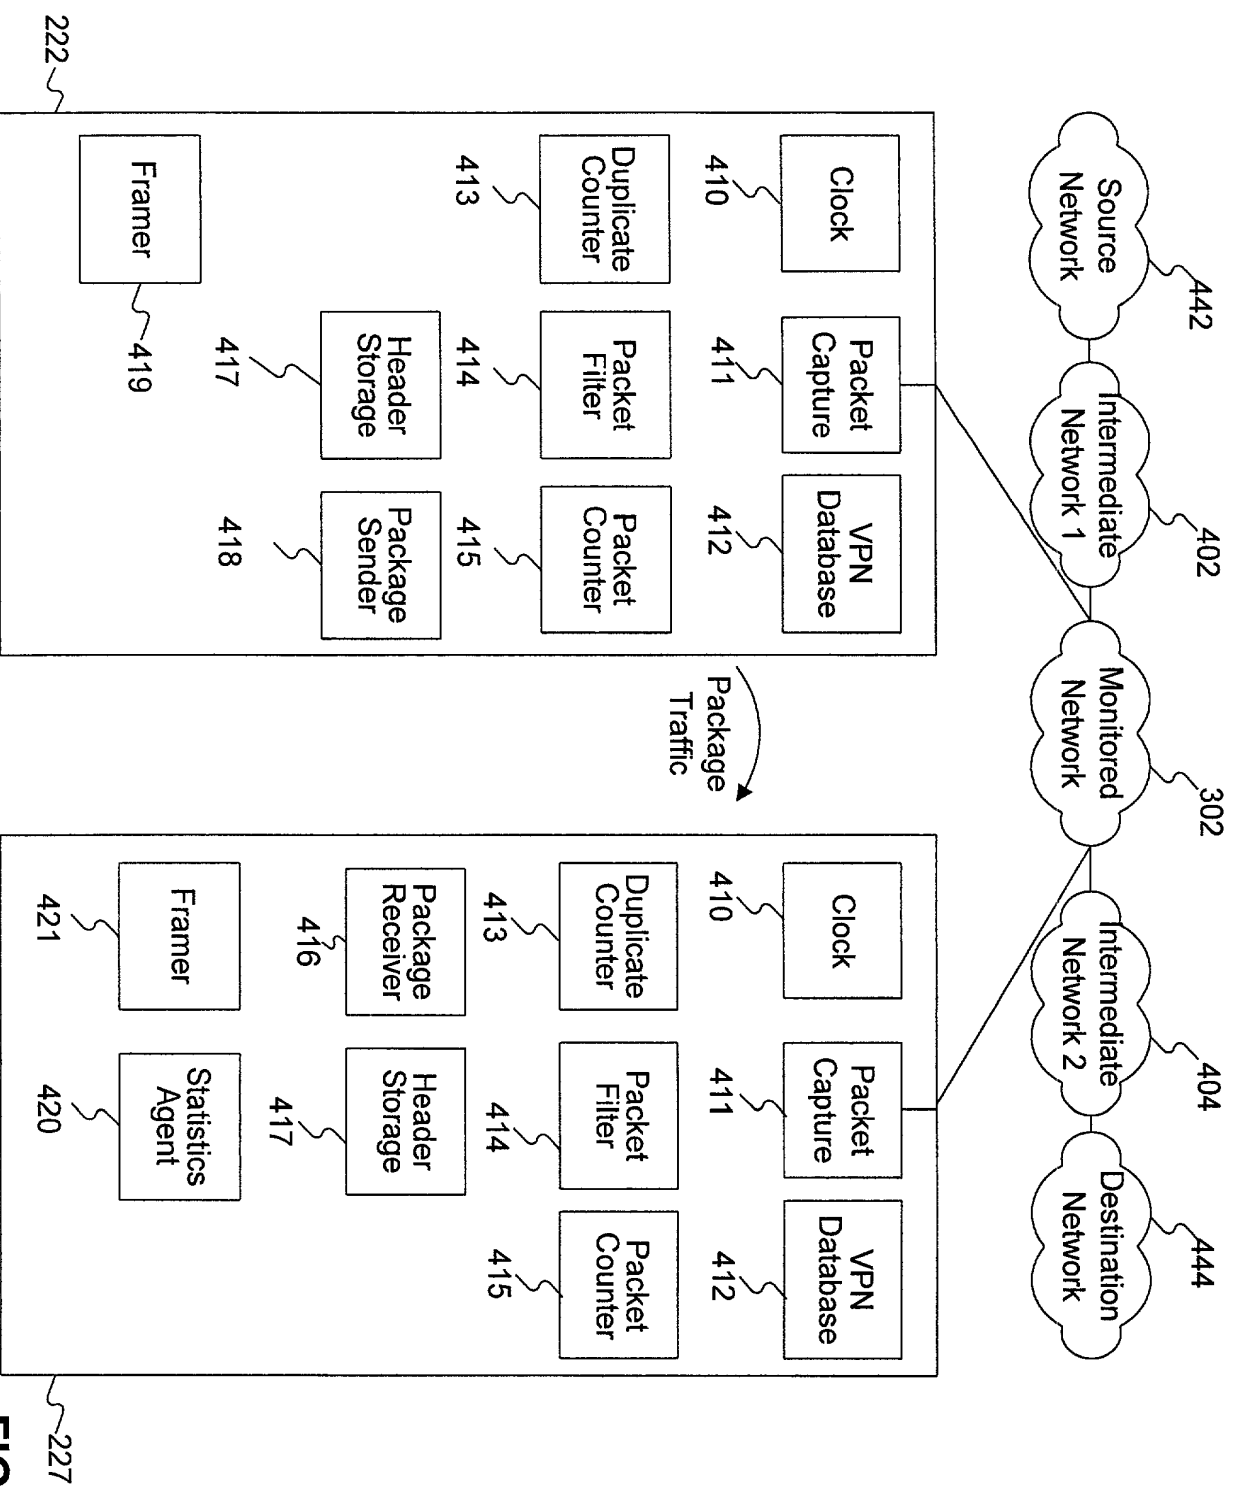


FIG. 4

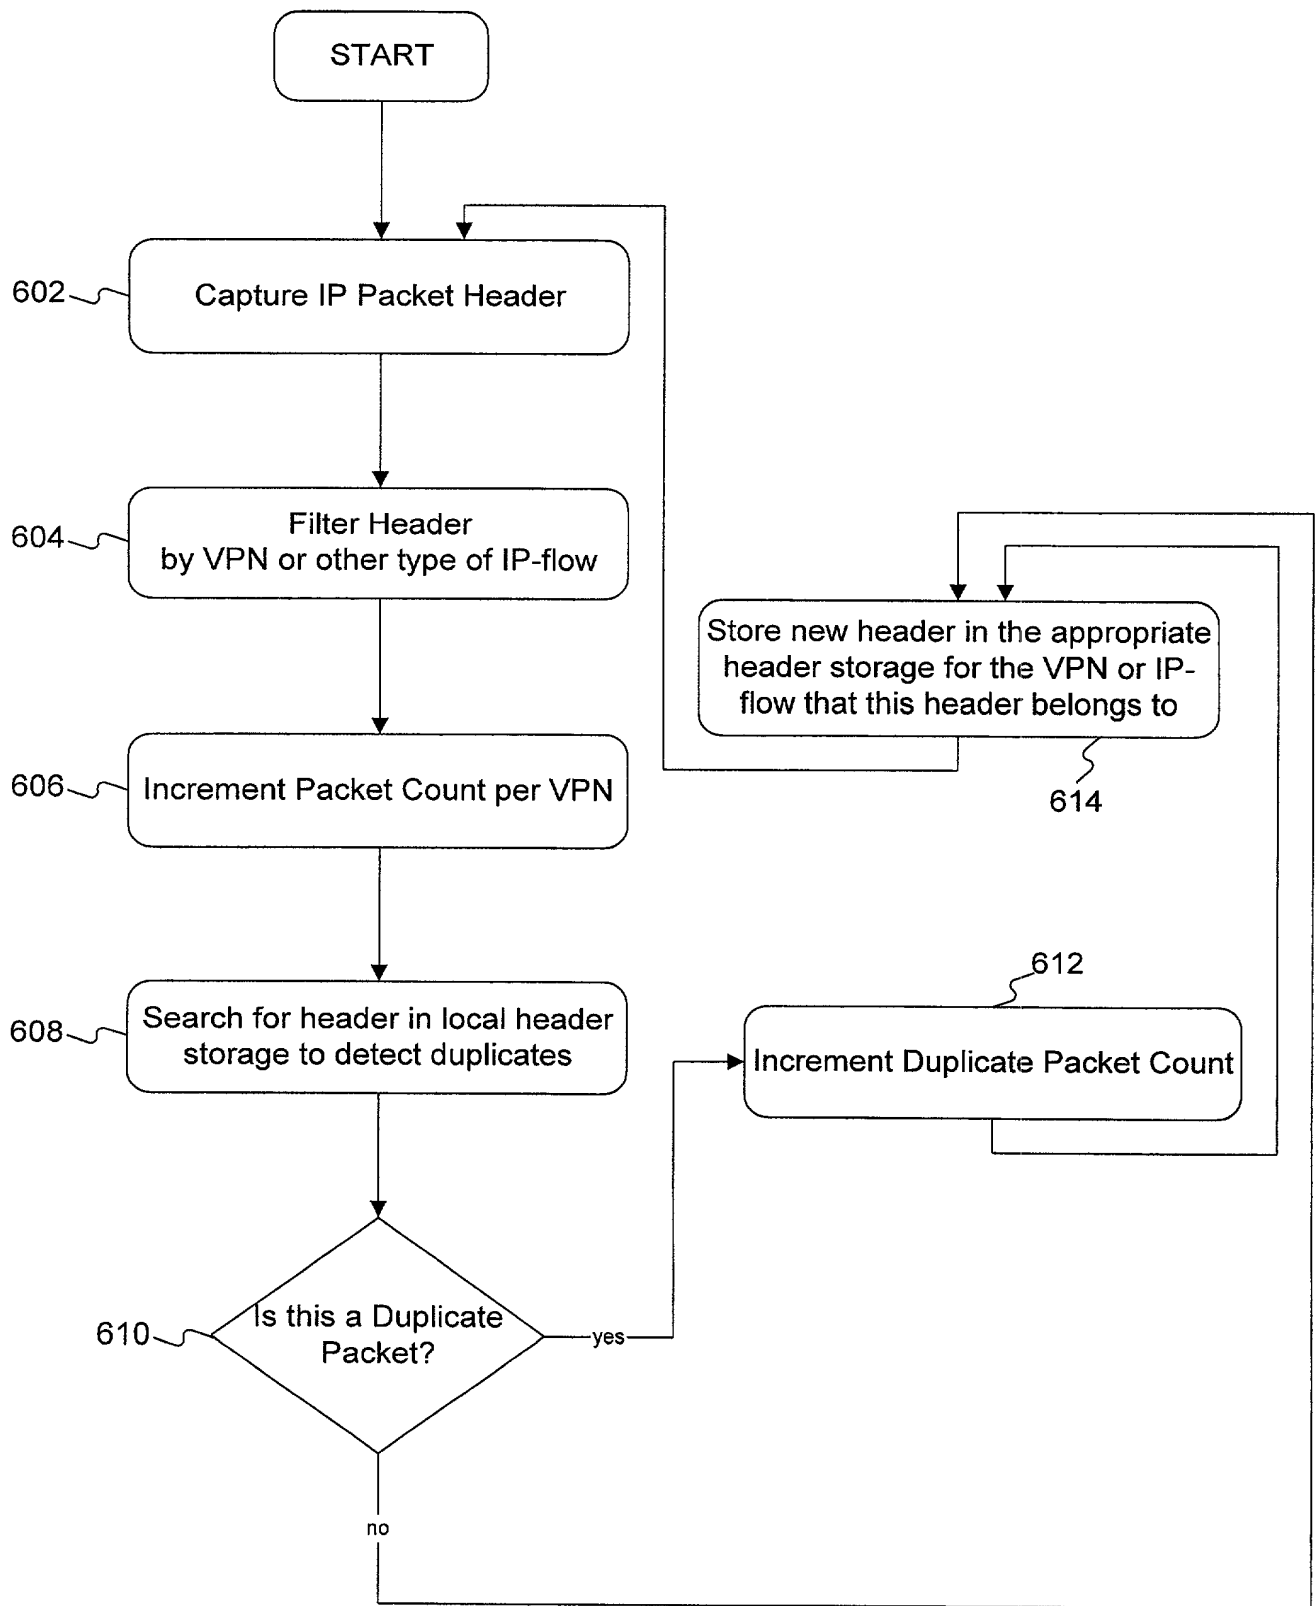


FIG. 6

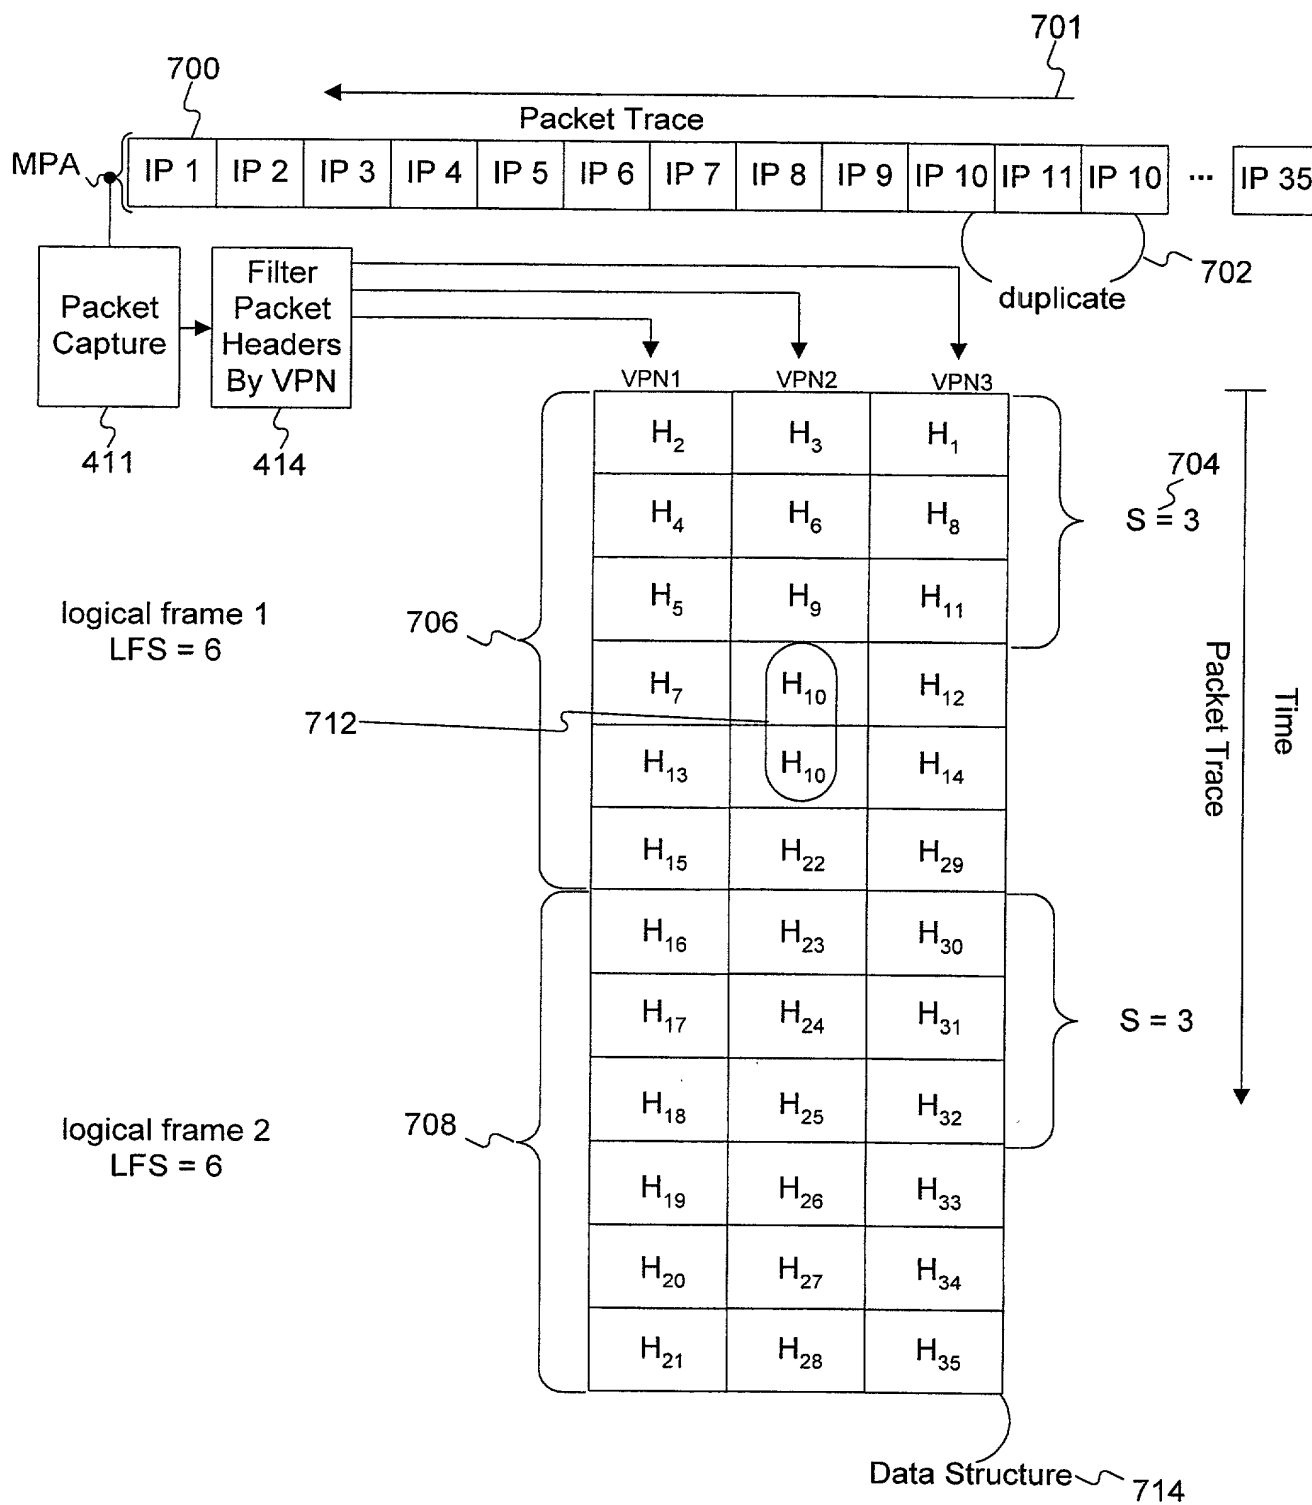


FIG. 7

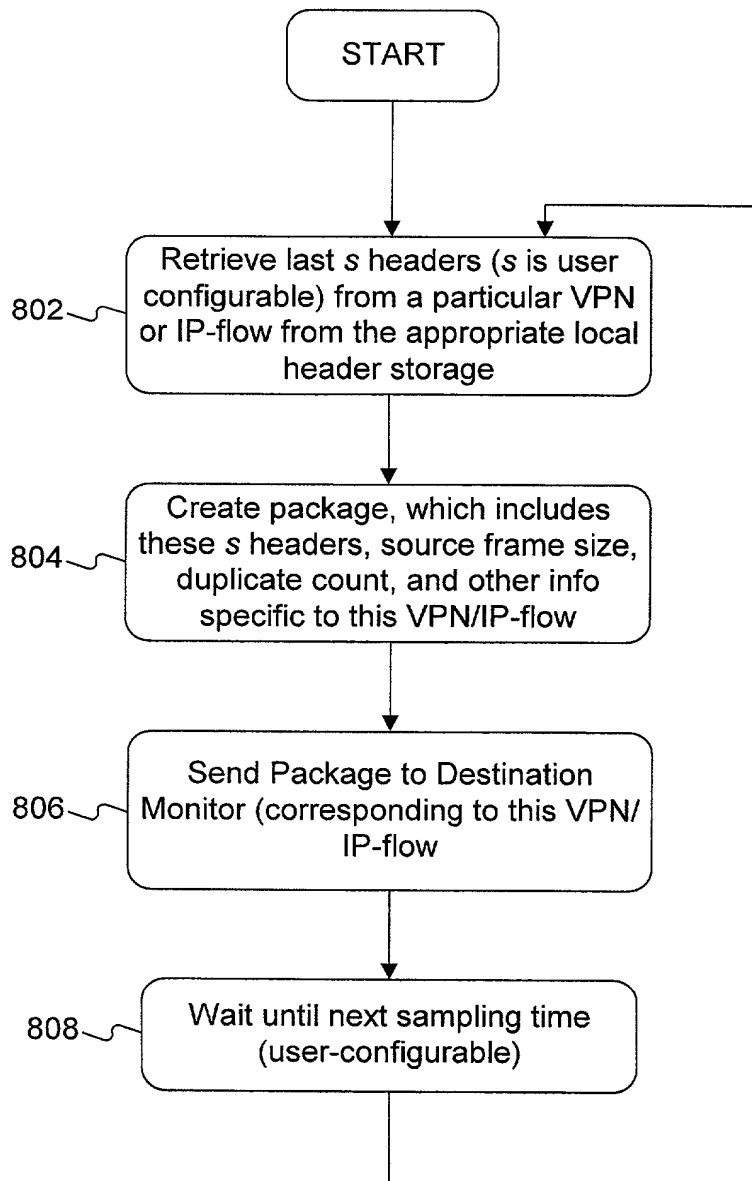


FIG. 8

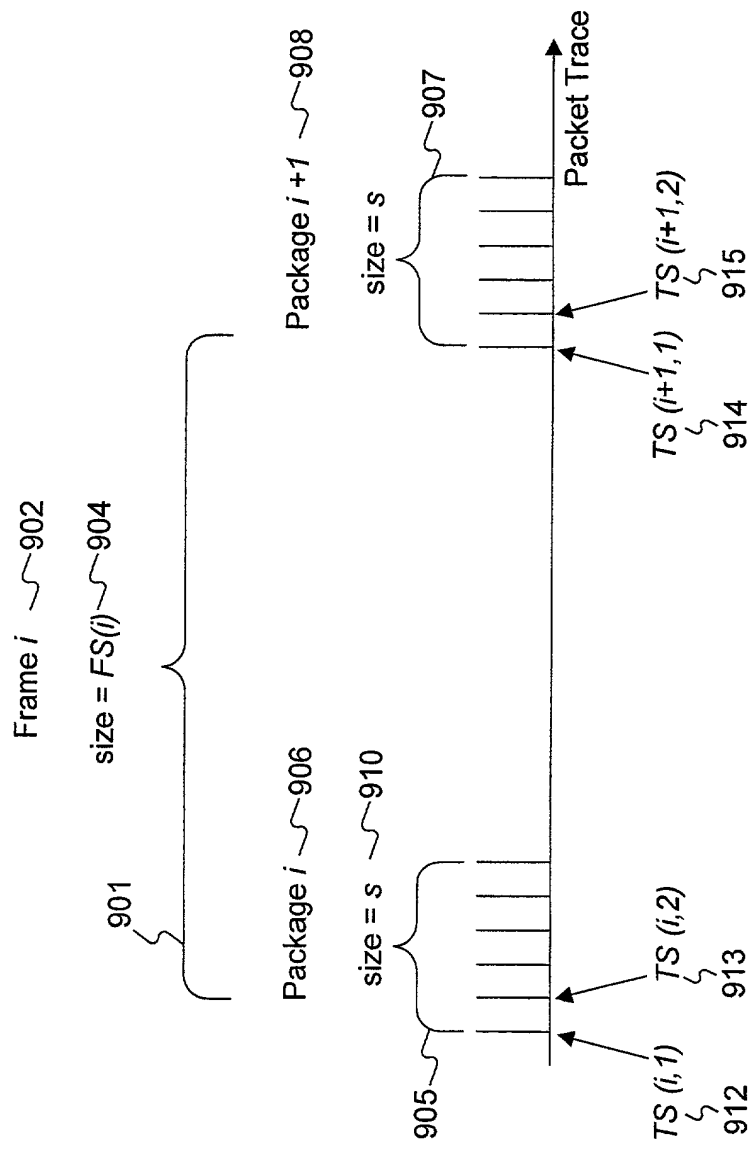


FIG. 9

Package Data Structure

1003	Flow identifier (a numeric value used to index the identifying information for a flow)											
1004	Frame number (for frame preceding the current package)											
1005	Package size (number of packet headers in current package) = PS											
1006	Src. addr/port 1	Dest. addr/port 1	IP identifier 1	Frag. flag/offset 1	Time stamp 1	Locally-generated sequence number 1	Running duplicate count 1					
1007	Src. addr/port 2	Dest. addr/port 2	IP identifier 2	Frag. flag/offset 2	Time stamp 2	Locally-generated sequence number 2	Running duplicate count 2					
1008	Src. addr/port 3	Dest. addr/port 3	IP identifier 2	Frag. flag/offset 3	Time stamp 3	Locally-generated sequence number 3	Running duplicate count 3					
					
1009	Src. addr/port PS	Dest. addr/port PS	IP identifier PS	Frag. flag/offset PS	Time stamp PS	Locally-generated sequence number PS	Running duplicate count PS					

FIG. 10

FIG. 11

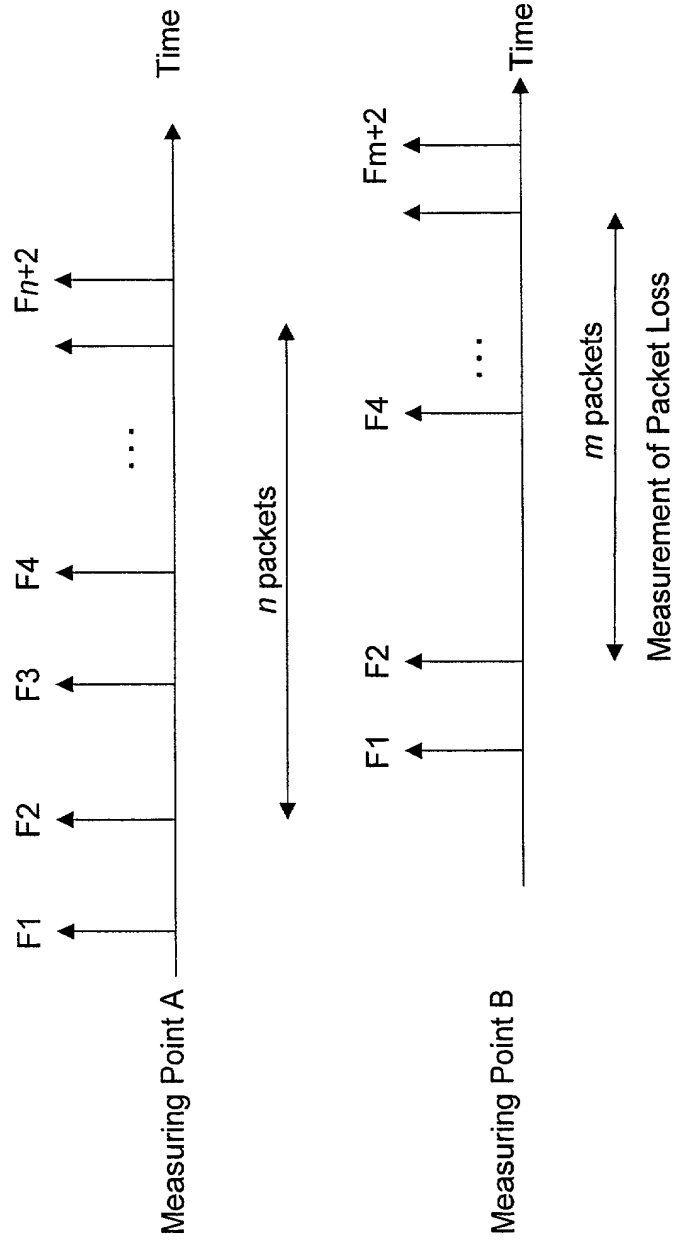


FIG. 13

Docket No.
APP 1211

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method and System for Measuring IP Performance Metrics

the specification of which

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*


Joseph Giordano (Reg. No. 35,158)
Orville R. Cockings (Reg. No. 42,424)
David A. Hey (Reg. No. 32,351)
Elizabeth A. Mark (Reg. No. 37,880)
James W. Falk (Reg. No. 16,154)

Send Correspondence to: **Joseph Giordano, Esq.**
Telcordia Technologies, Inc.
445 South Street - Room 1G-112R
Morristown, New Jersey 07960

Direct Telephone Calls to: *(name and telephone number)*
Joseph Giordano (973) 829-2352

Full name of sole or first inventor Krishna Kant
Sole or first inventor's signature <i>Krishna Kant</i> Date <i>4/26/00</i>
Residence Eatontown, Monmouth County, New Jersey
Citizenship USA
Post Office Address 95C White St.
Eatontown, New Jersey 07724

Full name of second inventor, if any Richard C. Lau
Second inventor's signature <i>Lau Richard C.</i> Date <i>4/26/00</i>
Residence Morganville, Monmouth County, New Jersey
Citizenship USA
Post Office Address 308 Flower Lane
Morganville, New Jersey 07751

Full name of third inventor, if any Bruce Siegell	
Third inventor's signature 	Date 4/26/2000
Residence Shrewsbury, Monmouth County, New Jersey	
Citizenship USA	
Post Office Address 450 Shrewsbury Plaza #195	
Shrewsbury, New Jersey 07702	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

05979371.052600